


### PHYSICAL SPECIFICATION


Nominal Voltage		6V
Nominal Capacity(20HR)		1.3AH
Dimension	Length	97±1mm (3.82 inches)
	Width	24±1mm (0.94 inches)
	Container Height	51±2mm (2.01 inches)
	Total Height	57±2mm (2.24 inches)
Weight		Approx. 0.30Kg (0.66 lbs)
Standard Terminal		F3-Fasten Tab No.170



Dimensions (mm)

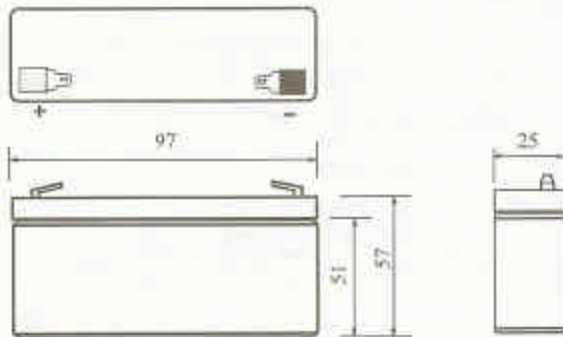


Standard Terminal  
F3 (Fasten Tab NO.170)

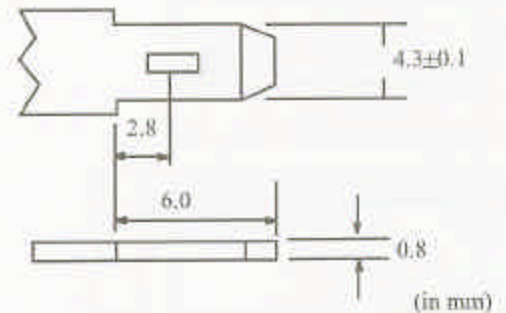

### ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.065A)	1.3Ah	It is recommended to use constant-voltage charge and recharge immediately after use.		
	10 hour rate(0.13A)	1.24Ah			
	5 hour rate(0.21A)	1.1Ah			
	1 hour rate(0.78A)	0.78Ah			
Capacity affected by temperature	40°C (104°F)	105%	Constant-Voltage Charge	Cycle	Initial Charging Current less than 0.39A
	20°C (68°F)	100%			Voltage 7.20-7.50V at 20°C (68°F)
	0°C (32°F)	85%	Standby	Voltage 6.75-6.90V at 20°C (68°F)	Temperature Coefficient -10mV/°C
Internal Resistance	Fully charged battery(20°C, 68°F)50mΩ				

Discharge Characteristics fully charged (20°C, 68°F)

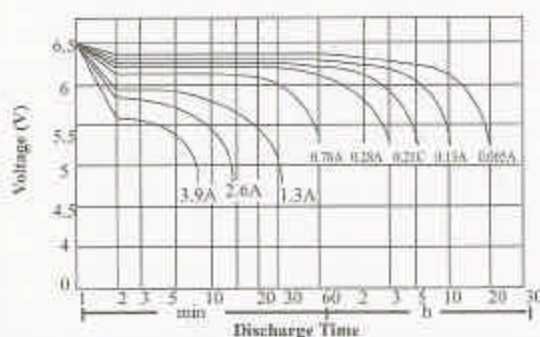

Discharge Characteristics (0°C/32°F, 40°C/104°F)

