
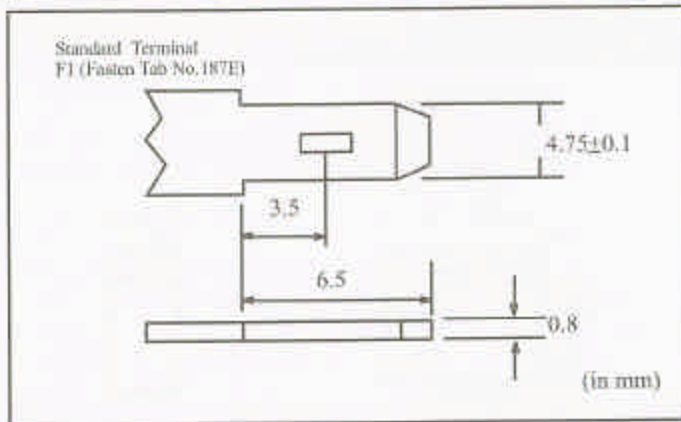


PHYSICAL SPECIFICATION

Nominal Voltage		6V
Nominal Capacity(20HR)		3.4AH
Dimension	Length	134±1mm (5.28 inches)
	Width	34±1mm (1.34 inches)
	Container Height	60±2mm (2.36 inches)
	Total Height	66±2mm (2.60 inches)
Weight		Approx 0.68Kg (1.49 lbs)
Standard Terminal		F1-Fasten Tab No.187E

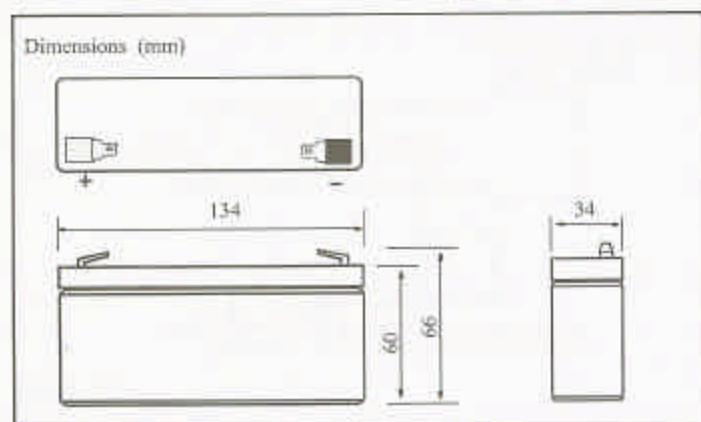

ELECTRICAL SPECIFICATION

Capacity	20 hour rate(0.17A)	3.4Ah	It is recommended to use constant-voltage charge and recharge immediately after use
	10 hour rate(0.34A)	3.23Ah	
	5 hour rate(0.54A)	2.89Ah	
	1 hour rate(2.04A)	2.04Ah	
Capacity affected by temperature	40°C (104°F)	105%	Constant-Voltage Charge
	20°C (68°F)	100%	
	0°C (32°F)	85%	
Internal Resistance	Fully charged battery(20°C, 68°F)25mΩ		Standby
			Cycle
			Initial Charging Current less than 0.99A
			Voltage 7.20-7.50V at 20°C (68°F)
			Temperature Coefficient-15mV/°C
			Standby
			Voltage 6.75-6.90V at 20°C (68°F)
			Temperature Coefficient-10mV/°C

